



RVL Series Variable Frequency Drives

Switches


RVL F

AC Variable Frequency Drives

Carlo Gavazzi RVL F drives offer a broad range of motor control solutions to meet a wide variety of application requirements – and each drive in the RVL F family has been designed to help maximize productivity. With the numerous features, yet easy to use interface, RVL F drives can help in the efficient handling of the simplest to the most demanding applications.

Thanks to the EMI built-in filter, the RVL F AC drives are extremely useful for low interference applications. They can also be used in small cabinets as a result of their compact dimensions and side-by-side installation. Installation time is reduced to the minimum with the DIN rail adapter and the built-in fan.

The new RVL F VariFlex³ can be used with single or three-phase system, the motor power can be from 0.2kW (0.25hp) to 2.0kW (3hp).

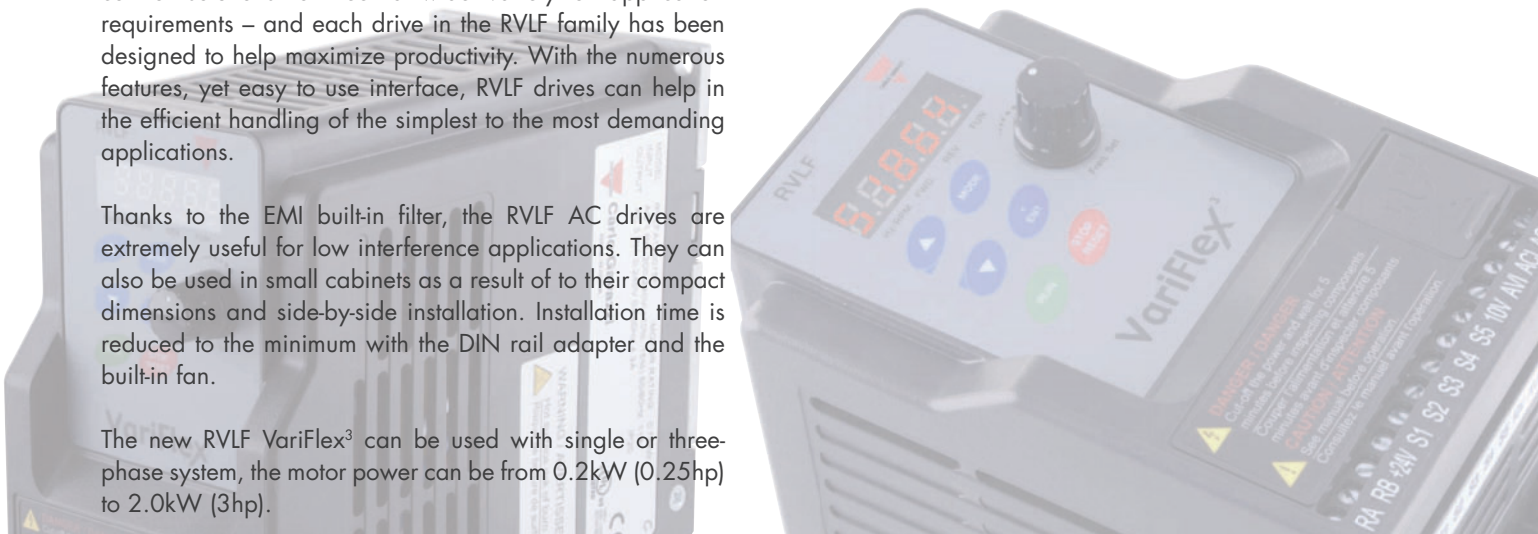

Variable Frequency Drives VariFlex³

Conformity

All VariFlex³ drives are approved according to the relevant European and North American safety standards. Conforms to EMI radio standard and EMC immunity standard EN 61800-3 for the second environment (Industrial sites).

Main features

- AC variable speed drive for use with AC induction motors
- V/F control + Auto-torque compensation function
- Input voltage ranges: 1-ph 200~240V, 3-ph 380~480V
- 2 frame sizes
- Conforms to EMC standard EN 61800-3
- Parameter settings by keypad
- IP 20 models with power switch
- DIN-rail or panel mounting
- Built-in EMI filter
- Frequency 0.01~650.00Hz
- Communication interface modules for Profibus/DeviceNet/Ethernet (TCP/IP)/CANopen

Space Reduction

The RVL F models can be installed side by side (if the ambient temperature inside the cabinet is between -10 to +50°C / -14° to +122°F).



Conveyors

Conveyors are typical applications where frequency devices offer a number of advantages. In the production there are many elements, often including tapes conveyors that must be efficiently connected between them to allow high production flows. RVLf ensures gradual starting and stopping of the tape conveyor and in this way reduces the mechanical stress on the tape and maintenance costs.

- Easy to install and configure
- Reduced installation time
- Less disturbance with built-in EMI filter
- Soft start without vibrations
- Higher torque at low speeds
- Full protective functions
- PID functionality with sleep function can help in further energy savings during low speed operation



Pump control

Frequency drives are used to regulate and circulate water as part of simple and more complex water treatment systems. An important component in a water treatment plant is the pump to move and regulate the flow of water.

- More efficient regulation of water
- No water hammering
- Higher starting torque
- PID functionality for closed loop control
- Easy to install and configure
- Wide output frequency range: up to 650Hz
- Flexible configuration with programmable relay output
- PID sleep/wake function can stop/start the pump depending on the feedback signal which results in more energy savings.



Air handling unit

Air handling units (AHU) are used to regulate and circulate air as part of an HVAC system in small as well as larger buildings. A major component in an air handling unit is the blower or fan that is required to move the air and regulate the air flow.

- Better regulation of air-flow
- Quieter operation of AHU fan
- Torque compensation function allows better control at low speed
- Less disturbance with built-in EMI filter
- PID functionality
- Easy to install and configure
- Reduced installation time
- Wide output frequency range: up to 650Hz
- PID functionality can be used for closed loop control
- Flexible configuration with programmable relay output



RVL F

AC Variable Frequency Drives

Features and benefits

PID function

- With PID sleep/wake function more energy saving is possible
- Closed-loop control of load/process

32 Bit microprocessor

- Faster response time
- Better speed accuracy
- Higher torque at low speed

Multi function inputs/outputs

- Flexible installation
- Output relay programmable NO or NC
- I/O signal status monitor on display


Auto-Sequencer

- Can replace a small PLC
- Control of different loads
- Individual acceleration/deceleration




- RA RB +24V S1 S2 S3 S4 S5 10V AVI ACI AO AGND
- Programmable NO or NC relay contact
- DC power supply: PNP: +24VDC
- Programmable digital inputs
- 0-10VDC supply
- 0-10VDC programmable analog output
- 0VDC
- Frequency reference AVI: external 0-10V
- ACI: 0-20mA or 4-20mA
- PID feed back

Programming software

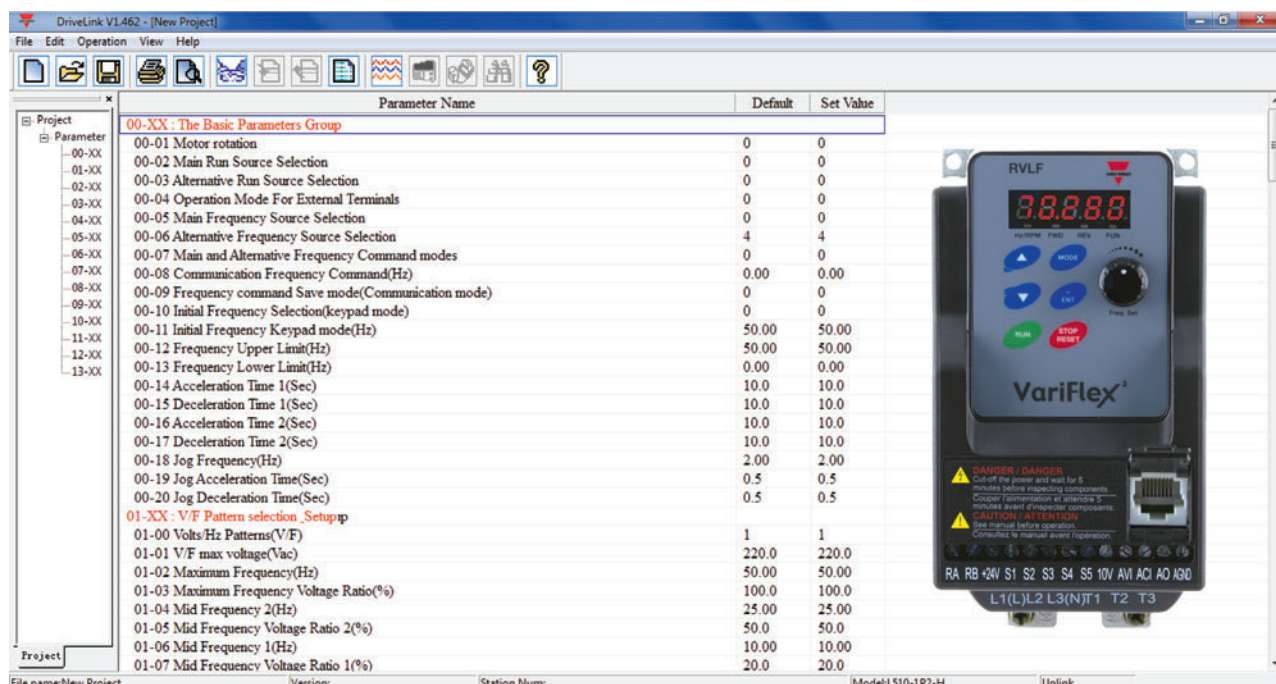


Thanks to the programming software, the operator can set the parameters of the device without the keypad and the control panel on the device.

Communication Interface

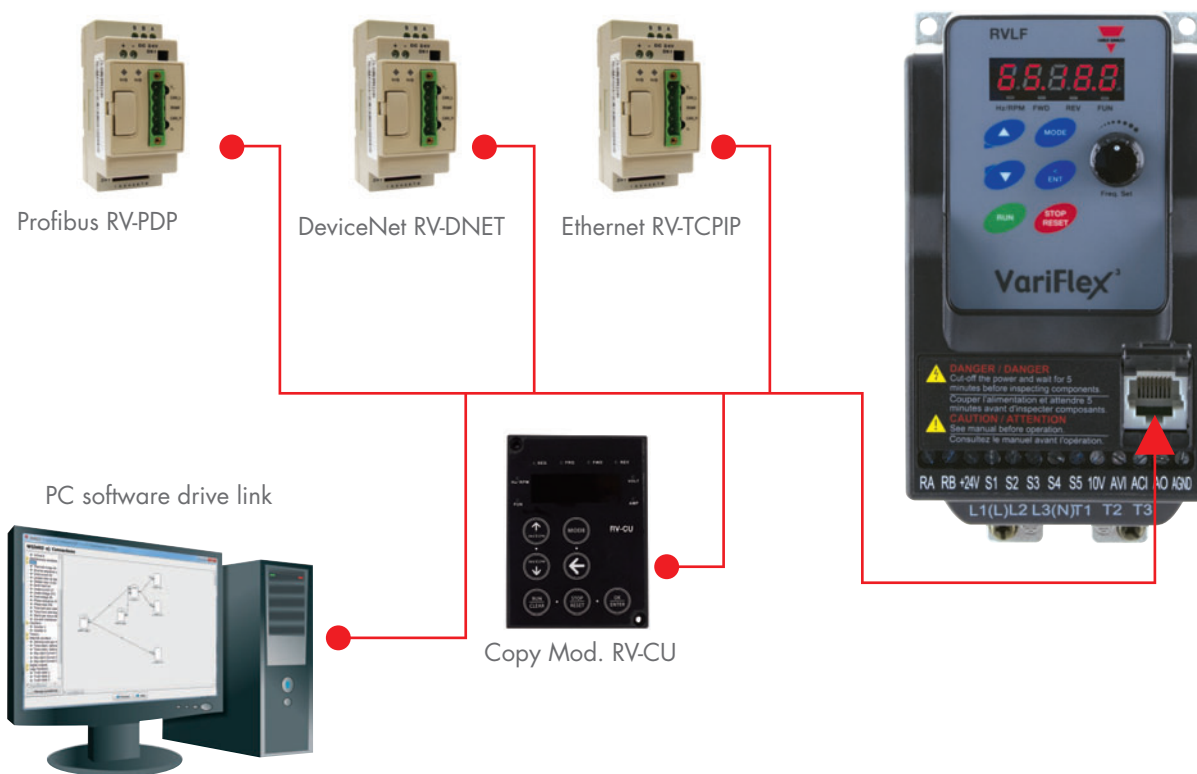


Profibus - Devicenet - Ethernet - Can-open, gateways are available for an easier integration into existing networks.

Dimensions

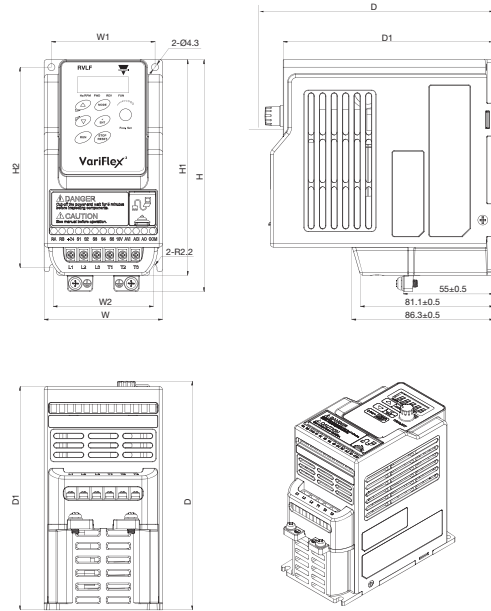

Size "A":

W: 72 (2.83); H: 141 (5.55); D: 139.2 (5.48) *mm / Inches

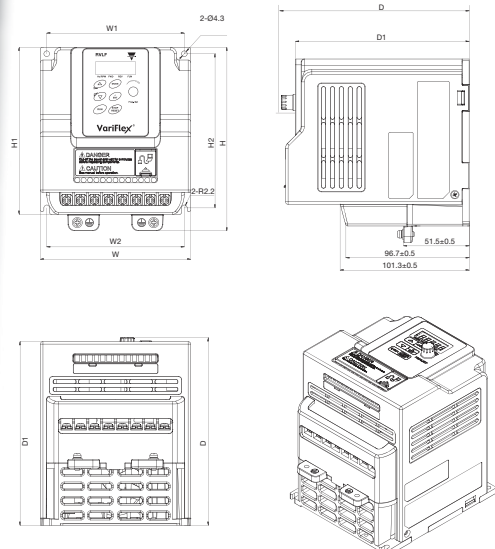

Size "B":

W: 118 (4.65); H: 144 (5.67); D: 147.3 (5.80) *mm / Inches

Main specifications

220V Class: Single phase

Model RVLF	RVLFA120020F	RVLFA120040F	RVLFA120075F	RVLFB120150F	RVLFB120220F
Horse power rating	0.25HP	0.25HP	0.25HP	0.25HP	0.25HP
Nominal motor power	0.2KW	0.4KW	0.75KW	1.5KW	2.2KW
Rated output current	1.8A	2.6A	4.3A	7.5A	10.5A
Rated capacity	0.68kVA	1.00kVA	1.65kVA	2.90kVA	4.00kVA
Input voltage range	Single phase: 200~240VAC (+10%-15%), 50/60HZ				
Output voltage range	Three phase: 0~240VAC				
Input current	4.9A	7.2A	11A	15.5A	21A
Allowable momentary power loss (s)	1.0	1.0	1.0	2.0	2.0
Protection class	IP20				

400V Class: Three phase

Model RVLF	RVLFB3400750F	RVLFB340150F	RVLFB340220F
Horse power rating	1HP	2HP	3HP
Nominal motor power	0.75KW	1.5KW	2.2KW
Rated output current	4.3A	7.5A	10.5A
Rated capacity	1.65kVA	2.90kVA	4.00kVA
Input voltage range	Three phase: 380~480VAC (+10%-15%), 50/60HZ		
Output voltage range	Three phase: 0~480VAC		
Input current	6.4A	9.4A	12.2A
Allowable momentary power loss (s)	1.0	2.0	2.0
Protection class	IP20		

OUR SALES NETWORK IN EUROPE

AUSTRIA

Carlo Gavazzi GmbH
Ketzergrasse 374,
A-1230 Wien
Tel: +43 1 888 4112
Fax: +43 1 889 10 53
office@carlogavazzi.at

FRANCE

Carlo Gavazzi Sarl
Zac de Paris Nord II, 69, rue de la Belle Etoile,
F-95956 Roissy CDG Cedex
Tel: +33 1 49 38 98 60
Fax: +33 1 48 63 27 43
french.team@carlogavazzi.fr

ITALY

Carlo Gavazzi SpA
Via Milano 13,
I-20020 Lainate
Tel: +39 02 931 761
Fax: +39 02 931 763 01
info@gavazziacbu.it

SPAIN

Carlo Gavazzi SA
Avda. Iparraguirre, 80-82,
E-48940 Leioa (Bizkaia)
Tel: +34 94 480 4037
Fax: +34 94 431 6081
gavazzi@gavazzi.es

BELGIUM

Carlo Gavazzi NV/SA
Mechelsesteenweg 311,
B-1800 Vilvoorde
Tel: +32 2 257 4120
Fax: +32 2 257 41 25
sales@carlogavazzi.be

GERMANY

Carlo Gavazzi GmbH
Pfnorstr. 10-14
D-64293 Darmstadt
Tel: +49 6151 81000
Fax: +49 6151 81 00 40
info@gavazzi.de

NETHERLANDS

Carlo Gavazzi BV
Wijkermeerweg 23,
NL-1948 NT Beverwijk
Tel: +31 251 22 9345
Fax: +31 251 22 60 55
info@carlogavazzi.nl

SWEDEN

Carlo Gavazzi AB
V:a Kyrkogatan 1,
S-652 24 Karlstad
Tel: +46 54 85 1125
Fax: +46 54 85 11 77
info@carlogavazzi.se

DENMARK

Carlo Gavazzi Handel A/S
Over Hadstenevej 40,
DK-8370 Hadsten
Tel: +45 89 60 6100
Fax: +45 86 98 15 30
handel@gavazzi.dk

GREAT BRITAIN

Carlo Gavazzi UK Ltd
4.4 Frimley Business Park,
Frimley, Camberley, Surrey GU16 7SG
Tel: +44 1 276 854 110
Fax: +44 1 276 682 140
sales@carlogavazzi.co.uk

NORWAY

Carlo Gavazzi AS
Melkeveien 13,
N-3919 Porsgrunn
Tel: +47 35 93 0800
Fax: +47 35 93 08 01
post@gavazzi.no

SWITZERLAND

Carlo Gavazzi AG
Verkauf Schweiz/Vente Suisse
Sumpfstrasse 3,
CH-6312 Steinhausen
Tel: +41 41 747 4535
Fax: +41 41 740 45 40
info@carlogavazzi.ch

FINLAND

Carlo Gavazzi OY AB
Petaksentie 2-4,
FI-00630 Helsinki
Tel: +358 9 756 2000
Fax: +358 9 756 20010
myynti@gavazzi.fi

PORTUGAL

Carlo Gavazzi Lda
Rua dos Jerónimos 38-B,
P-1400-212 Lisboa
Tel: +351 21 361 7060
Fax: +351 21 362 13 73
carlogavazzi@carlogavazzi.pt

OUR SALES NETWORK IN THE AMERICAS

USA

Carlo Gavazzi Inc.
750 Hastings Lane,
Buffalo Grove, IL 60089, USA
Tel: +1 847 465 6100
Fax: +1 847 465 7373
sales@carlogavazzi.com

CANADA

Carlo Gavazzi Inc.
2660 Meadowvale Boulevard,
Mississauga, ON L5N 6M6, Canada
Tel: +1 905 542 0979
Fax: +1 905 542 22 48
gavazzi@carlogavazzi.com

MEXICO

Carlo Gavazzi Mexico S.A. de C.V.
Calle La Montaña no. 28, Fracc. Los Pastores
Naucalpan de Juárez, EDOMEX CP 53340
Tel & Fax: +52.55.5373.7042
mexicosales@carlogavazzi.com

BRAZIL

Carlo Gavazzi Automação Ltda.
Av. Francisco Matarazzo, 1752
Conj 2108 - Barra Funda - São Paulo/SP
Tel: +55 11 3052 0832
Fax: +55 11 3057 1753
info@carlogavazzi.com.br

OUR SALES NETWORK IN ASIA AND PACIFIC

SINGAPORE

Carlo Gavazzi Automation
Singapore Pte. Ltd.
61 Tai Seng Avenue
#05-06 UE Print Media Hub
Singapore 534167
Tel: +65 67 466 990
Fax: +65 67 461 980
info@carlogavazzi.com.sg

MALAYSIA

Carlo Gavazzi Automation
(M) SDN. BHD.
D12-06-G, Block D12,
Pusat Perdagangan Dana 1,
Jalan PJU 1A/46, 47301 Petaling Jaya,
Selangor, Malaysia.
Tel: +60 3 7842 7299
Fax: +60 3 7842 7399
sales@gavazzi-asia.com

CHINA

Carlo Gavazzi Automation
(China) Co. Ltd.
Unit 2308, 23/F.,
News Building, Block 1, 1002
Middle Shennan Zhong Road,
Shenzhen, China
Tel: +86 755 83699500
Fax: +86 755 83699300
sales@carlogavazzi.cn

HONG KONG

Carlo Gavazzi Automation
Hong Kong Ltd.
Unit 3 12/F Crown Industrial Bldg.,
106 How Ming St., Kwun Tong,
Kowloon, Hong Kong
Tel: +852 23041228
Fax: +852 23443689

OUR COMPETENCE CENTRES AND PRODUCTION SITES

DENMARK

Carlo Gavazzi Industri A/S
Hadsten

MALTA

Carlo Gavazzi Ltd
Zejtun

ITALY

Carlo Gavazzi Controls SpA
Belluno

LITHUANIA

Uab Carlo Gavazzi Industri Kaunas
Kaunas

CHINA

Carlo Gavazzi Automation (Kunshan) Co., Ltd.
Kunshan

HEADQUARTERS

Carlo Gavazzi Automation SpA
Via Milano, 13
I-20020 - Lainate (MI) - ITALY
Tel: +39 02 931 761
info@gavazziautomation.com



CARLO GAVAZZI
Automation Components

Energy to Components!

www.gavazziautomation.com

